


J1 pin convention

- 1 Return A
- 2 In 1
- 3 In 2
- 4 In 3
- 5 In 4
- 6 In 13
- 7 In 14
- 8 In 15
- 9 In 12
- 10 Return C
- 11 In 17
- 12 In 18
- 13 In 19
- 14 In 20
- 15 In 29
- 16 In 30
- 17 In 31
- 18 In 32
- 19 Not used
- 20 In 5
- 21 In 6
- 22 In 7
- 23 In 8
- 24 Return B
- 25 In 9
- 26 In 10
- 27 In 11
- 28 In 16
- 29 In 21
- 30 In 22
- 31 In 23
- 32 In 24
- 33 Return D
- 34 In 25
- 35 In 26
- 36 In 27
- 37 In 28

GTB255d  
J1

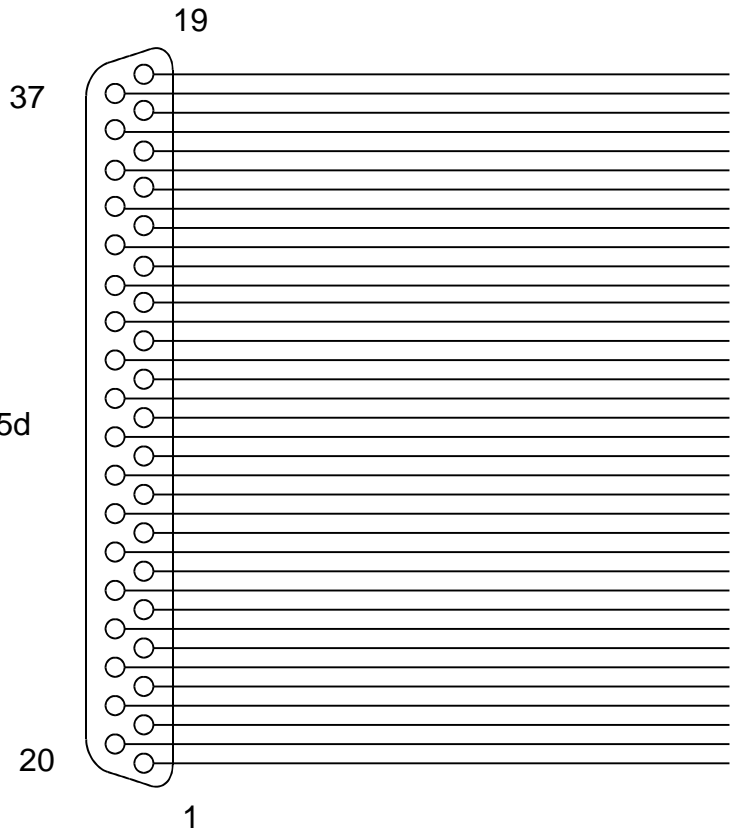

- AC, BC, CC, DC Power +
- D4 In 12
- D8 In 16
- D3 In 11
- D7 In 15
- D2 In 10
- D6 In 14
- D1 In 9
- D5 In 13
- DR Power -
- C4 In 4
- C8 In 8
- C3 In 3
- C7 In 7
- C2 In 2
- C6 In 6
- C1 In 1
- C5 In 5
- CR Power -
- B4 In 12
- B8 In 16
- B3 In 11
- B7 In 15
- B2 In 10
- B6 In 14
- B1 In 9
- B5 In 13
- BR Power -
- A4 In 4
- A8 In 8
- A3 In 3
- A7 In 7
- A2 In 2
- A6 In 6
- A1 In 1
- A5 In 5
- AR Power -

Siemens  
505-4332  
32 point DIN